


Gelenklager GE GE160GS-IKO - GE160GS-IKO

<https://www.123kugellager.ch/kugellager-gehauselager/gelenkkopfe-gelenklager/ge/ge160gs-iko>

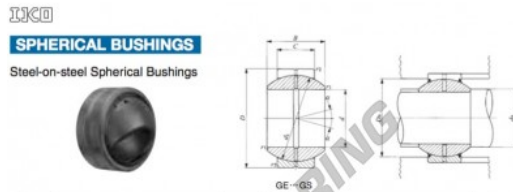

Shaft dia. mm	Identification number		Mass (ref.) kg	Boundary dimensions mm						Permissible tilting angle degree			
	Without seals	With seals		d	D	B	C	d_s	r_1 (1)	r_2 (1)	α	α_1	
160	GE 160GS		25.4	160	260	135	80	225	1	1.1	16	14	
Mounting dimensions mm			Dynamic load capacity C_d N	Static load capacity C_s N									
d_s		D_s											
Min.	Max.(2)	Max.	Min.										
165.5	180	253	221	1 770 000	10 600 000								

Notes (1) Minimum allowable value of chamfer dimensions r_1 and r_2 .
(2) When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of d_s .
Remark: 1. The inner ring and the outer ring have an oil groove and two oil holes, respectively.
2. Not provided with prepacked grease. Perform proper lubrication for use.

PRODUKTMERKMALE

Marke	IKO
N° Ean13	3663952392585
Innendurchmesser	160 mm
Außendurchmesser	260 mm
Dicke	135 mm
Typ	GE
Schmierung	ohne
Verpackung	1

kontakt@123kugellager.ch

+49 (0) 800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE