


## Gelenklager GE GE60EC-2RS-IKO - GE60EC-2RS-IKO

<https://www.123kugellager.ch/kugellager-gehauselager/gelenkkopfe-gelenklager/ge/ge60ec-2rs-iko>

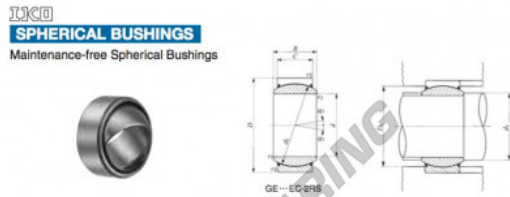

Shaft dia. mm	Identification number		Mass (Ref.) kg	Boundary dimensions mm						Permissible tilting angle degree		
	Without seals	With seals		d	D	B	C	d <sub>k</sub>	r <sub>1s</sub> mm <sup>(1)</sup>	r <sub>2s</sub> mm <sup>(1)</sup>	α	α <sub>1</sub>
60	—	<b>GE 60EC-2RS</b>	1,10	60	90	44	36	80	1	1	—	3
Mounting dimensions mm			Dynamic load capacity C <sub>d</sub>		Static load capacity C <sub>s</sub>							
d <sub>s</sub>		D <sub>s</sub>		N		N						
Min.	Max. <sup>(2)</sup>	Max.	Min.	282 000		706 000						
65.5	66.5	84.5	79									

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimensions r<sub>1</sub> and r<sub>2</sub>  
<sup>(2)</sup> When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of d<sub>s</sub>.  
 Remark No oil hole is provided.

### PRODUKTMERKMALE

Marke	IKO
N° Ean13	3663952393223
Innendurchmesser	60 mm
Außendurchmesser	90 mm
Dicke	44 mm
Typ	GE
Schmierung	ohne
Verpackung	1

[kontakt@123kugellager.ch](mailto:kontakt@123kugellager.ch)

+49 (0) 800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE