


Axial nadellager AZK16027015-IKO - AZK16027015-IKO

<https://www.123kugellager.ch/kugellager-gehauselager/nadellager/axial-nadellager/azk16027015-iko>

IKO
THRUST BEARINGS

Thrust Roller Bearings

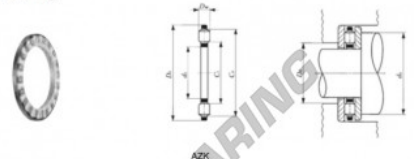

| Shaft dia. mm | Identification number | | | | | | |
|------------------|-----------------------|---------------|-----------------------|---------------|------------|------------|---------------|
| | Thrust roller bearing | Mass (Ref.) g | Thrust roller bearing | Mass (Ref.) g | Inner ring | Outer ring | Mass (Ref.) g |
| 160 | AZ 16027039 | 10 800 | AZK 16027015 | 3 840 | WS 160270 | GS 160270 | 3 480 |

| Boundary dimensions mm | | | | | | | | | | Standard mounting dimensions mm | | Basic dynamic load rating C | Basic static load rating C ₀ | Allowable rotational speed ⁽²⁾ |
|---------------------------|-----|----|----------------|----------------|----------------|----|--------------------|----------------|----------------|------------------------------------|------------------------|-----------------------------------|-----------------------------------------------|-------------------------------------------------|
| d | D | T | d _c | D _c | D _w | B | r _s (1) | C ₁ | C ₂ | d _s Min. | D _s Max. | N | N | rpm |
| 160 | 270 | 39 | 160.1 | 269 | 15 | 12 | 3 | 183 | 256 | 255 | 184 | 519 000 | 2 850 000 | 1 400 |

Notes: (1) Minimum allowable value of chamfer dimension r
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

PRODUKTMERKMALE

| | |
|------------------|---------------|
| Marke | IKO |
| N° Ean13 | 3616060466754 |
| Innendurchmesser | 160 mm |
| Innendurchmesser | 6.299" inch |
| Außendurchmesser | 270 mm |
| Außendurchmesser | 10.63" inch |
| Dicke | 15 mm |
| Dicke | 0.591" inch |
| Gewicht | 3840 g |
| Verpackung | 1 |

kontakt@123kugellager.ch

+49 (0) 800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE