


## Nadelhülsenlager TAM2525-IKO - TAM2525-IKO

<https://www.123kugellager.ch/kugellager-gehauselager/nadellager/nadelhulsenlager/tam2525-iko>

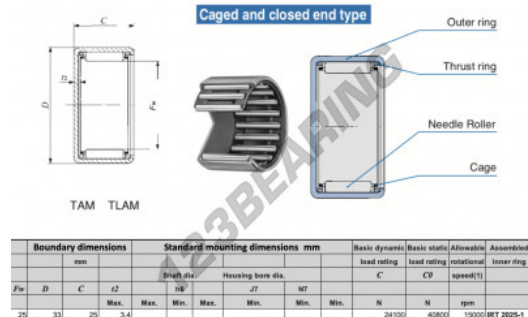

Boundary dimensions			Standard mounting dimensions mm						Basic dynamic load rating		Basic static load rating		Allowable rotational speed (1)		Assembled inner ring
mm			Bore dia.		Housing bore dia.				C	CP	N	N	rpm		
Fw	D	C	W	H	JT	KT	NT	Min.	Max.	N	N	rpm			
25	33	25	Max. 3.4							24100	40800	15000	IRT 2025-1		

### PRODUKTMERKMALE

Marke	IKO
N° Ean13	3616060599322
Innendurchmesser	25 mm
Innendurchmesser	0.984" inch
Außendurchmesser	33 mm
Außendurchmesser	1.299" inch
Dicke	25 mm
Dicke	0.984" inch
Grenzdrehzahl	15000 rpm
Dynamische Belastung	24.1 kN
Statische Belastung	40.8 kN
Verpackung	1

[kontakt@123kugellager.ch](mailto:kontakt@123kugellager.ch)

+49 (0) 800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE