


## Nadelhülsenlager BA1612-Z-IKO - BA1612-Z-IKO

<https://www.123kugellager.ch/kugellager-gehauselager/nadellager/nadelhulsenlager/ba1612-z-iko>

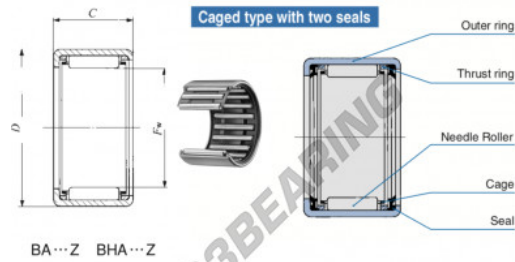

| Boundary dimensions mm(inch) |                 |                 | Standard mounting dimensions mm |       |      |      | Basic dynamic load rating | Basic static load rating | Allowable rotational speed <sup>1)</sup> | Assembled inner ring |
|------------------------------|-----------------|-----------------|---------------------------------|-------|------|------|---------------------------|--------------------------|--|----------------------|
| $F_w$                        | $D$             | $C$             | $G$                             | $b_6$ | $JT$ | $C$  | $C_0$                     | rpm                      |  |                      |
| 25.400 (1.0118)              | 31.750 (1.2496) | 19.050 (0.7500) | 2.8                             | Max.  | Min. | Max. | Min.                      | 14200                    | 24300                                    | 15000 (RB 1212)      |

### PRODUKTMERKMALE

|                      |               |
|----------------------|---------------|
| Marke                | IKO           |
| N° Ean13             | 3616060601186 |
| Innendurchmesser     | 25.4 mm       |
| Außendurchmesser     | 31.75 mm      |
| Dicke                | 19.05 mm      |
| Grenzdrehzahl        | 15000 rpm     |
| Dynamische Belastung | 14.2 kN       |
| Statische Belastung  | 24.3 kN       |
| Verpackung           | 1             |

[kontakt@123kugellager.ch](mailto:kontakt@123kugellager.ch)

+49 (0) 800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE