


## Nadelhülsenlager BA2410-Z-IKO - BA2410-Z-IKO

<https://www.123kugellager.ch/kugellager-gehauselager/nadellager/nadelhulsenlager/ba2410-z-iko>

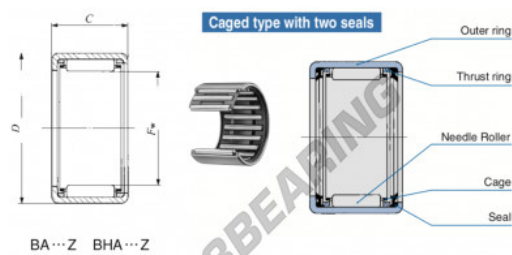

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable speed(r/min)	Assembled inner ring
$F_w$	D	C	$d_2$	$d_1$	Housing bore dia.	C	C <sub>10</sub>	C <sub>0</sub>	speed(r/min)		
38.100 (1.5)	47.625 (1.875)	15.88 (0.625)	2.6		Min.	Max.	Min.	Max.	N	N	r/min
							17800	27100	9000	IRB 2010	

### PRODUKTMERKMALE

Marke	IKO
N° Ean13	3616060601438
Innendurchmesser	38.1 mm
Außendurchmesser	47.625 mm
Dicke	15.88 mm
Grenzdrehzahl	9000 rpm
Dynamische Belastung	17.8 kN
Statische Belastung	27.1 kN
Verpackung	1

[kontakt@123kugellager.ch](mailto:kontakt@123kugellager.ch)

+49 (0) 800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE