


Nadelhülsenlager BA1212-Z-IKO - BA1212-Z-IKO

<https://www.123kugellager.ch/kugellager-gehauselager/nadellager/nadelhulsenlager/ba1212-z-iko>

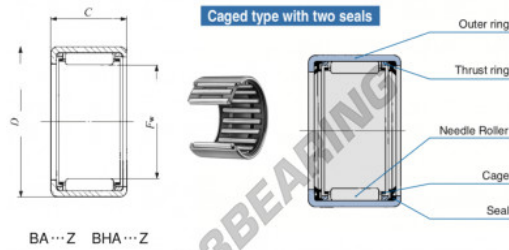

| Boundary dimensions mm(inch) | | Standard mounting dimensions mm | | | | Basic dynamic load rating | | Basic static load rating | | Allowable | Assembled |
|------------------------------|------------|---------------------------------|-------|--------|-------------------|---------------------------|--------|--------------------------|---------------------------------|------------|-----------|
| F_w | D | C | r_2 | b_6 | Housing bore dia. | | C | C_0 | rotational speed ⁽¹⁾ | inner ring | |
| | | | Min. | Max. | Min. | Max. | N | N | rpm | | |
| 19.050 (0.4) | 25.400 (1) | 19.050 (750) | 1.3 | 19.050 | 19.037 | 25.412 | 25.391 | 11900 | 17700 | 20000 | IRB #12-1 |

PRODUKTMERKMALE

| | |
|----------------------|---------------|
| Marke | IKO |
| N° Ean13 | 3616060603180 |
| Innendurchmesser | 19.05 mm |
| Außendurchmesser | 25.4 mm |
| Dicke | 19 mm |
| Grenzdrehzahl | 20000 rpm |
| Dynamische Belastung | 11 kN |
| Statische Belastung | 17 kN |
| Verpackung | 1 |

kontakt@123kugellager.ch

+49 (0) 800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE