


Pendelkugellager 1316-K-M-C3-FAG - 1316-K-M-C3-FAG

<https://www.123kugellager.ch/kugellager-gehauselager/rillenkugellager/pendelkugellager/1316-k-m-c3-fag>

Self-aligning ball bearings 1316-K-M-C3
main dimensions to DIN 630, with tapered bore, taper 1:12

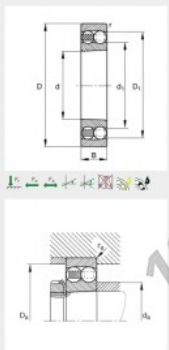

| | |
|--------------------|---|
| d | 80 mm |
| D | 170 mm |
| B | 39 mm |
| D ₁ | 144,3 mm |
| D _{1,max} | 156 mm |
| d ₁ | 110,2 mm |
| d ₂ | 92 mm |
| r _{1,max} | 2,1 mm |
| r ₂ | 2,1 mm |
| m | 4,5 kg Mass |
| C | 89000 N Basic dynamic load rating, radial |
| e | 0,22 |
| Y ₁ | 2,87 |
| Y ₂ | 4,44 |
| C ₀ | 33000 N Basic static load rating, radial |
| Y ₀ | 3 |
| n ₁ | 6000 1/min Limiting speed |
| n ₂ | 6300 1/min Reference speed |
| C ₁₀ | 1810 N Fatigue limit load, radial |

PRODUKTMERKMALE

| | |
|------------------|---------------|
| Marke | FAG |
| N° Ean13 | 3663952346663 |
| Innendurchmesser | 80 mm |
| Außendurchmesser | 170 mm |
| Dicke | 39 mm |
| Verpackung | 1 |

kontakt@123kugellager.ch

+49 (0) 800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE